

Area of Application:  
Panel mounted  
Technical gases 2.0

Max. Working pressure 16 bar ( 232 psi )

Details:  
Needle headwork open/close 3x360°  
3-Zone colour, acc. to EN13792:2002


1/2" removable nozzle

Materials in media contact:  
Brass  
Rubber, FKM  
PP  
Perfluoropolyether based lubricant

Mounting:  
RWC


Inlet / outlet connection:  
UniFlex  
DIN 12 898 hose nozzle

Polypropylene handle


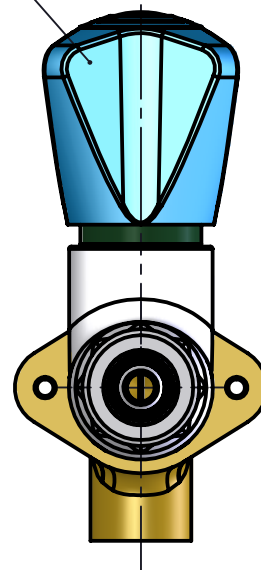


0-20mm wall thickness

BROEN-LAB  
UniFlex female thread

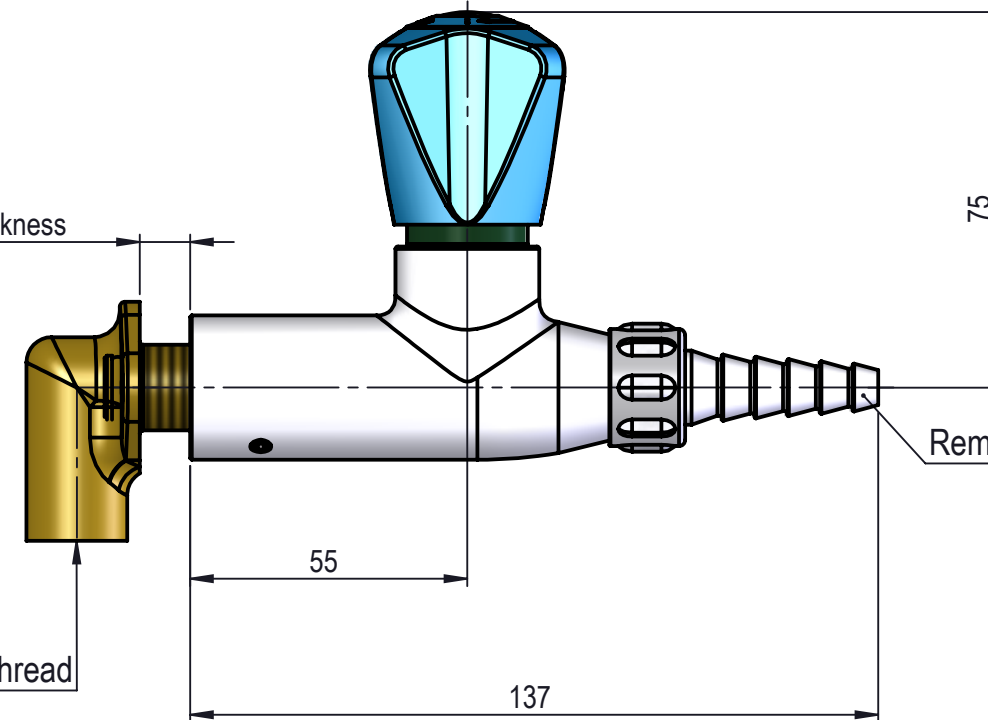

Removable Polypropylene nozzle

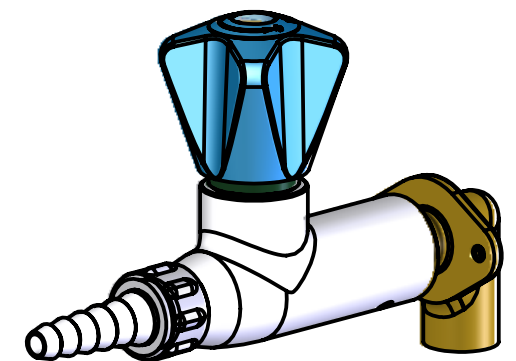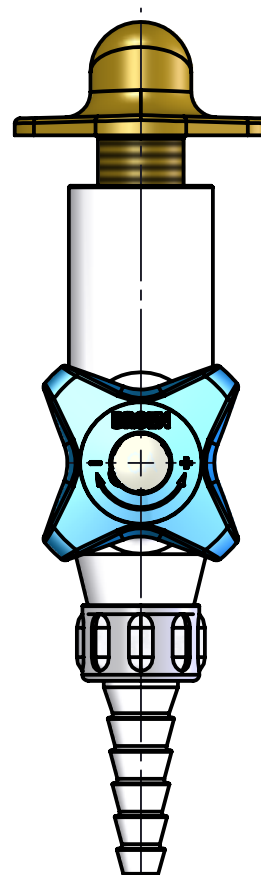

MEDIA CODE XX FOR  
2.0 TECHNICAL GASES

Media	Media description	Media code XX
CA	Compressed air	21
N <sub>2</sub>	Nitrogen	23
CO <sub>2</sub>	Carbon dioxide	24
Ar	Argon	25
He	Helium	26
RA	Regulated air	42

Description: 1-Valve, Panel mounted, 1-Hole, Rem. Nozzle, UniFlex

							Media: Technical gases 2.0		
							Comments:		
							Drawing type: Customer drawing		Weight: 0.621 Kg
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: BJP	Drawn by: MWA	Released on TM No. 15-05-2017
<b>BROEN-LAB</b>							Format: A3	Drawing No.: 253222410XX-40	

This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.